


- D-SUB CABLE 9/15 POLES
- COMPACT INTERFACE
- SCREW CONNECTORS
- DIN RAIL MOUNTING EN50.022
- SELF-EXTINGUISHED MATERIAL UL94 V0

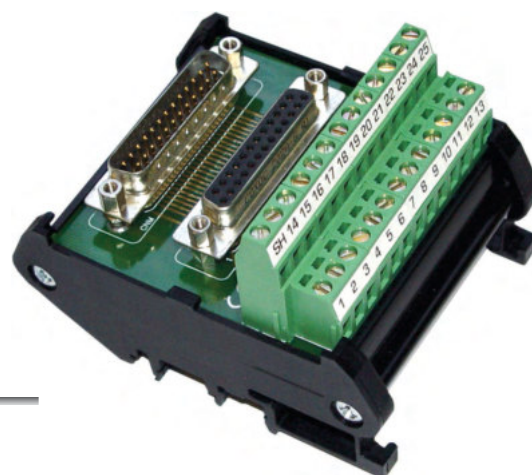

EU Directives - CE Marking:

> 2014/30/UE - EMC

> 2014/35/UE - LVD


TECHNICAL DATA

	UNIT	IPV09FM	IPV09MM	IPV09FMM	IPV15FM	IPV15MM	IPV15FMM
Input AC/DC rated voltage	V~ / $\equiv$	0 - 75			0 - 75		
Max. current for channel	A	1			1		
Number of Pole for interface	-	9			15		
Input Connection	-	Screw Terminal Block - 2.5mm ²			Screw Terminal Block - 2.5mm ²		
Output Connection D-Sub	-	Female	Male	Female and Male	Female	Male	Female and Male
Working temperature	°C	-20 / +60			-20 / +60		
Storage temperature	°C	-30 / +85			-30 / +85		
Protection degree	IP	00			00		
Pollution degree	-	2			2		
Weight	g	57		65	85		95
Dimensions	mm	93 x 39 x 63			93 x 49 x 63		

TECHNICAL DATA

	UNIT	IPV25FM	IPV25MM	IPV25FMM	IPV37FM	IPV37MM	IPV37FMM
Input AC/DC rated voltage	V~ / $\equiv$	0 - 75			0 - 75		
Max. current for channel	A	1			1		
Number of Pole for interface	-	25			37		
Input Connection	-	Screw Terminal Block - 2.5mm ²			Screw Terminal Block - 2.5mm ²		
Output Connection D-Sub	-	Female	Male	Female and Male	Female	Male	Female and Male
Working temperature	°C	-20 / +60			-20 / +60		
Storage temperature	°C	-30 / +85			-30 / +85		
Protection degree	IP	00			00		
Pollution degree	-	2			2		
Weight	g	126		140	146		160
Dimensions	mm	93 x 73 x 63			93 x 110 x 63		

DIMENSIONS (mm)

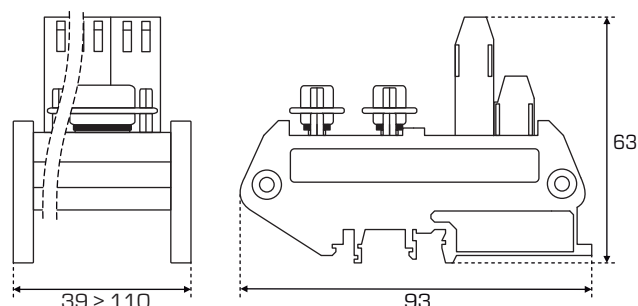

WIRING DIAGRAM

