

- ▶ SWITCH KEY SELECTOR FOR CHANGEOVER COMMAND
- ▶ MANUAL CONTROL OF GENERATOR/MAINS
- ▶ LED INDICATION STATUS
- ▶ 96X96 CASE FOR PANEL MOUNTING
- ▶ SELF-EXTINGUISHED MATERIAL UL94 V0



EU Directives - CE Marking:

- > 2014/30/UE - EMC
- > 2014/35/UE - LVD


TECHNICAL DATA

	UNIT	MTS
Key Selector Max Contact Voltage.....	V~	250
Key Selector Max Contact Current.....	A	5
Working Temperature.....	°C	-20 / +50
Storage Temperature.....	°C	-30 / +70
Protection degree.....	IP	20
Pollution degree.....	-	2
Relative Humidity w/o cond.....	RH%	95
Altitude up to.....	m	2000
Weight.....	g	150
Dimensions.....	mm	96 x 96 x 72

LED INDICATIONS:


- ▶ **LR:** MAINS SIDE
- ▶ **LG:** GENERATOR SIDE
- ▶ **LM:** ENGINE RUNNING
- ▶ **LA:** ENGINE ALARM

DIMENSIONS (mm)

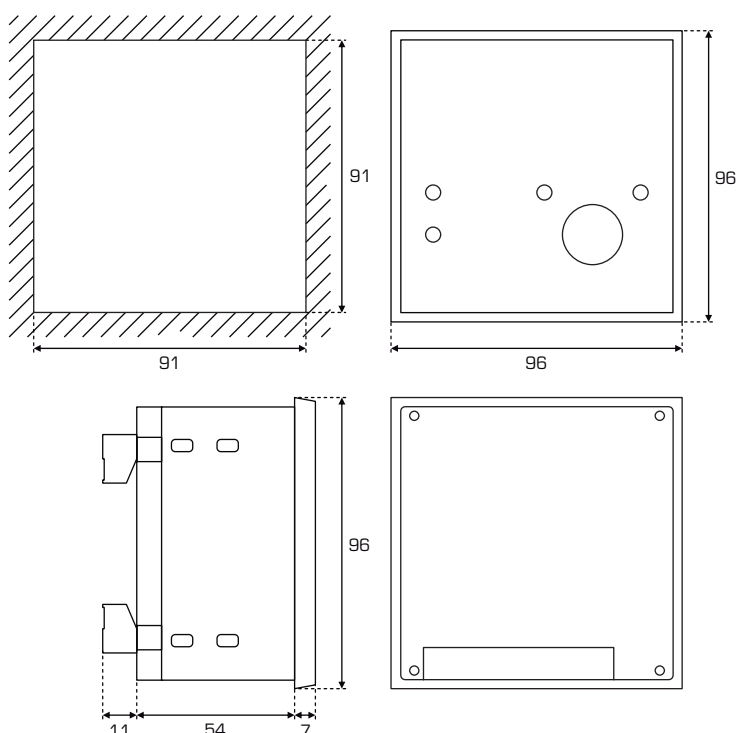

WIRING DIAGRAM

- INTERNAL CONNECTIONS

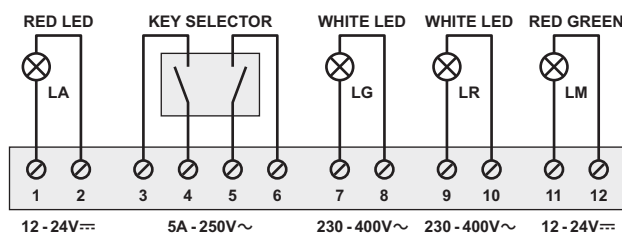

- TYPICAL APPLICATION

